


### Electromagnetic Induction High Bay- 150W, 200W, 250W & 300W

**Model No: IHBL**

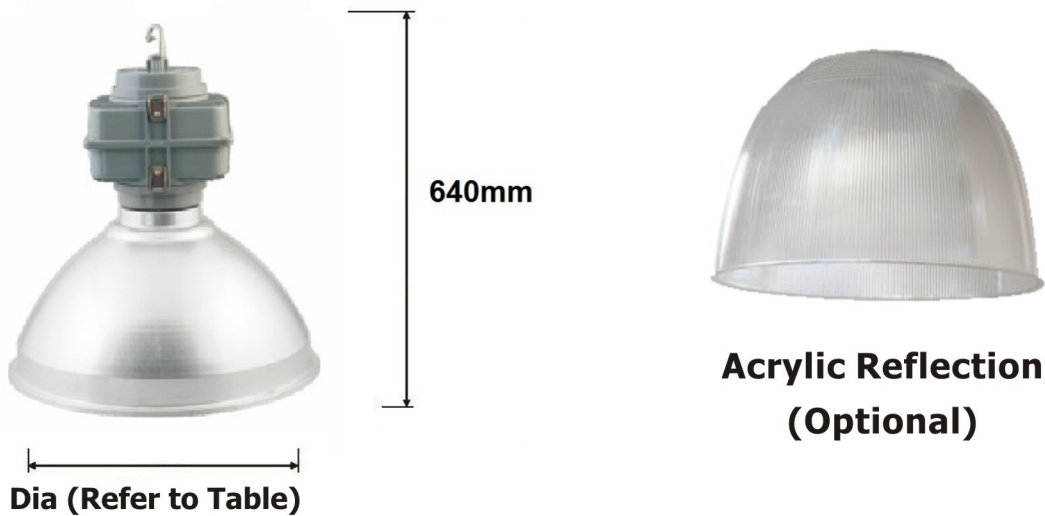

Model No:	Lamp Wattage	Voltage	Power Factor	Lumen	Colour Temperature	Fitting Size (mm)
IHBL-150	150W	AC200-240V	0.98	12,000	2700-6500K	H640(H) x 490 (Dia)
IHBL-200	200W	AC200-240V	0.98	16,000	2700-6500K	H640(H) x 490 (Dia)
IHBL-250	250W	AC200-240V	0.98	20,000	2700-6500K	H640(H) x 490 (Dia)
IHBL-300	300W	AC200-240V	0.98	24,000	2700-6500K	H640(H) x 550 (Dia)

#### Induction Light Features Compare to Metal Halide:

- Electromagnetic induction lamp life is up to 80k to 100k hours compare to metal halide lamp life of 10k to 20k hours
- Efficiency: Induction lamp with average of 80lm/w compare to metal halide lamp output of 40lm/w
- No electrode or filament inside the lamp
- Environment friendly - using solid amalgam which have no mercury substances.
- No flashing and non glaring
- Very high power factor (PF)
- Instant start without preheating
- Optional for dimmable down to 50%

